



**SPC BENCHMARK 1™**

**FULL DISCLOSURE REPORT**

**FUJITSU LIMITED  
ETERNUS AF250 S2**

**SPC-1 V3.5.0**

**SUBMISSION IDENTIFIER: A32003**

**SUBMITTED FOR REVIEW: NOVEMBER 5, 2017**

### **Third Edition – February 2018**

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESS OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by Fujitsu Limited for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

This publication was produced in the United States. Fujitsu Limited may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change with notice. Consult your local Fujitsu Limited representative for information on products and services available in your area.

© Copyright Fujitsu Limited 2017. All rights reserved.

Permission is hereby granted to publicly disclose and reproduce this document, in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

### **Trademarks**

SPC Benchmark 1, SPC-1, SPC-1 IOPS, SPC-1 LRT and SPC-1 Price-Performance are trademarks of the Storage Performance Council.

Eternus are trademarks or registered trademarks of Fujitsu Limited in the United States and other countries. All other brands, trademarks, and product names are the property of their respective owners.

### **Benchmark Specification and Glossary**

The official SPC Benchmark 1™ (SPC-1™) specification is available on the website of the Storage Performance Council (SPC) at [www.storageperformance.org](http://www.storageperformance.org).

The SPC-1™ specification contains a glossary of the SPC-1™ terms used in this publication.

## Table of Contents

<b>Audit Certification</b> .....	<b>4</b>
<b>Letter Of Good Faith</b> .....	<b>6</b>
<b>Executive Summary</b> .....	<b>7</b>
<b>Configuration Information</b> .....	<b>12</b>
<b>Benchmark Configuration and Tested Storage Configuration</b> .....	<b>12</b>
<b>Benchmark Configuration Creation Process</b> .....	<b>14</b>
<b>Benchmark Execution Results</b> .....	<b>15</b>
<b>Benchmark Execution Overview</b> .....	<b>15</b>
<b>SUSTAIN Test Phase</b> .....	<b>16</b>
<b>RAMPD_100 Test Phase</b> .....	<b>19</b>
<b>Response Time Ramp Test</b> .....	<b>22</b>
<b>Repeatability Test</b> .....	<b>24</b>
<b>Data Persistence Test</b> .....	<b>27</b>
<b>Appendix A: Supporting Files</b> .....	<b>28</b>
<b>Appendix B: Third Party Quotation</b> .....	<b>29</b>
<b>Appendix C: Tuning Parameters and Options</b> .....	<b>30</b>
<b>Appendix D: Storage Configuration Creation</b> .....	<b>32</b>
<b>Appendix E: Configuration Inventory</b> .....	<b>34</b>
<b>Appendix F: Workload Generator</b> .....	<b>35</b>

# AUDIT CERTIFICATION



Kun Katsumata  
 Fujitsu Limited  
 1250 East Arques Ave.  
 PO Box 3470  
 Sunnyvale, CA 94088-3470

November 4, 2017

I verified the SPC Benchmark 1™ (SPC-1™ V3.5.0) test execution and performance results of the following Tested Storage Product:

## ETERNUS AF250 S2

The results were:

<b>SPC-1 IOPS™</b>	<b>360,070</b>
<b>SPC-1 Price-Performance™</b>	<b>\$0.10/SPC-1 IOPS™</b>
SPC-1 IOPS™ Response Time	0.673 ms
SPC-1 Overall Response Time	0.361 ms
SPC-1 ASU Capacity	3,435 GB
SPC-1 ASU Price	\$9.86/GB
SPC-1 Total System Price	\$33,851.38

In my opinion, these performance results were produced in compliance with the SPC requirements for the benchmark.

The testing was executed using the SPC-1 Toolkit Version v03.00.2551. The audit process was conducted in accordance with the SPC Policies and met the requirements for the benchmark.

A Letter of Good Faith was issued by the Test Sponsor, stating the accuracy and completeness of the documentation and testing data provided in support of the audit of this result.

A Full Disclosure Report for this result was prepared by InfoSizing, reviewed and approved by the Test Sponsor, and can be found at [www.storageperformance.org](http://www.storageperformance.org) under the Submission Identifier A32003.

63 Lourdes Dr. | Leominster, MA 01453 | 978-343-6562 | [www.sizing.com](http://www.sizing.com)

The independent audit process conducted by InfoSizing included the verifications of the following items:

- The physical capacity of the data repository;
- The total capacity of the Application Storage Unit (ASU);
- The accuracy of the Benchmark Configuration diagram;
- The tuning parameters used to configure the Benchmark Configuration;
- The Workload Generator commands used to execute the testing;
- The validity and integrity of the test result files;
- The compliance of the results from each performance test;
- The compliance of the results from each persistence test;
- The compliance of the submitted pricing model; and
- The differences between the tested and the priced configuration, if any.

The Full Disclosure Report for this result was prepared in accordance with the disclosure requirements set forth in the specification for the benchmark.

The following benchmark requirements, if any, were waived in accordance with the SPC Policies:

None.

Respectfully Yours,



Doug Johnson, Certified SPC Auditor

# LETTER OF GOOD FAITH



---

Kanagawa-ken, Kawasaki-shi, Nakahara-ku, Kamikodanaka, 4-1-1, JAPAN 211-8588  
Phone: 044-754-3423

November 1, 2017  
From: Yoshinori Terao, Fujitsu Limited

To: Doug Johnson, SPC Auditor  
InfoSizing.  
64 Lourdes Drive  
Leominster, MA 01453-6709. U.S.A.

Contact Information: Kun Katsumata  
Fujitsu America, Inc.  
1250 East Arques Ave. PO Box 3470  
Sunnyvale, CA 94088, U.S.A.

Subject: SPC-1 Letter of Good Faith for the FUJITSU Storage ETERNUS AF250 S2

Fujitsu Limited is the SPC-1 Test Sponsor for the above listed product. To the best of our knowledge and belief, the required SPC-1 benchmark results and materials we have submitted for that product are complete, accurate, and in full compliance with V3.5 of the SPC-1 benchmark specification.

In addition, we have reported any items in the benchmark configuration and execution of the benchmark necessary to reproduce the reported results even if the items are not explicitly required to be disclosed by the SPC-1 benchmark specification.

Signed:

Date:

  
\_\_\_\_\_  
Yoshinori Terao  
Vice President, System Development Div. II

  
\_\_\_\_\_  
November 1st, 2017



## SPC BENCHMARK 1™

### EXECUTIVE SUMMARY

#### FUJITSU LIMITED ETERNUS AF250 S2


<b>SPC-1 IOPS™</b>	<b>360,070</b>
<b>SPC-1 Price-Performance™</b>	<b>\$94.02/SPC-1 KIOPS™</b>
SPC-1 IOPS™ Response Time	0.673 ms
SPC-1 Overall Response Time	0.361 ms
SPC-1 ASU Capacity	3,435 GB
SPC-1 ASU Price	\$9.86/GB
SPC-1 Total System Price	\$33,851.38
Data Protection Level	Protected 2 (RAID1)
Physical Storage Capacity	9,600 GB
Pricing Currency / Target Country	U.S. Dollars / USA

#### SPC-1 V3.5.0

**SUBMISSION IDENTIFIER: A32003**

**SUBMITTED FOR REVIEW: NOVEMBER 5, 2017**

### Benchmark Configuration Diagram

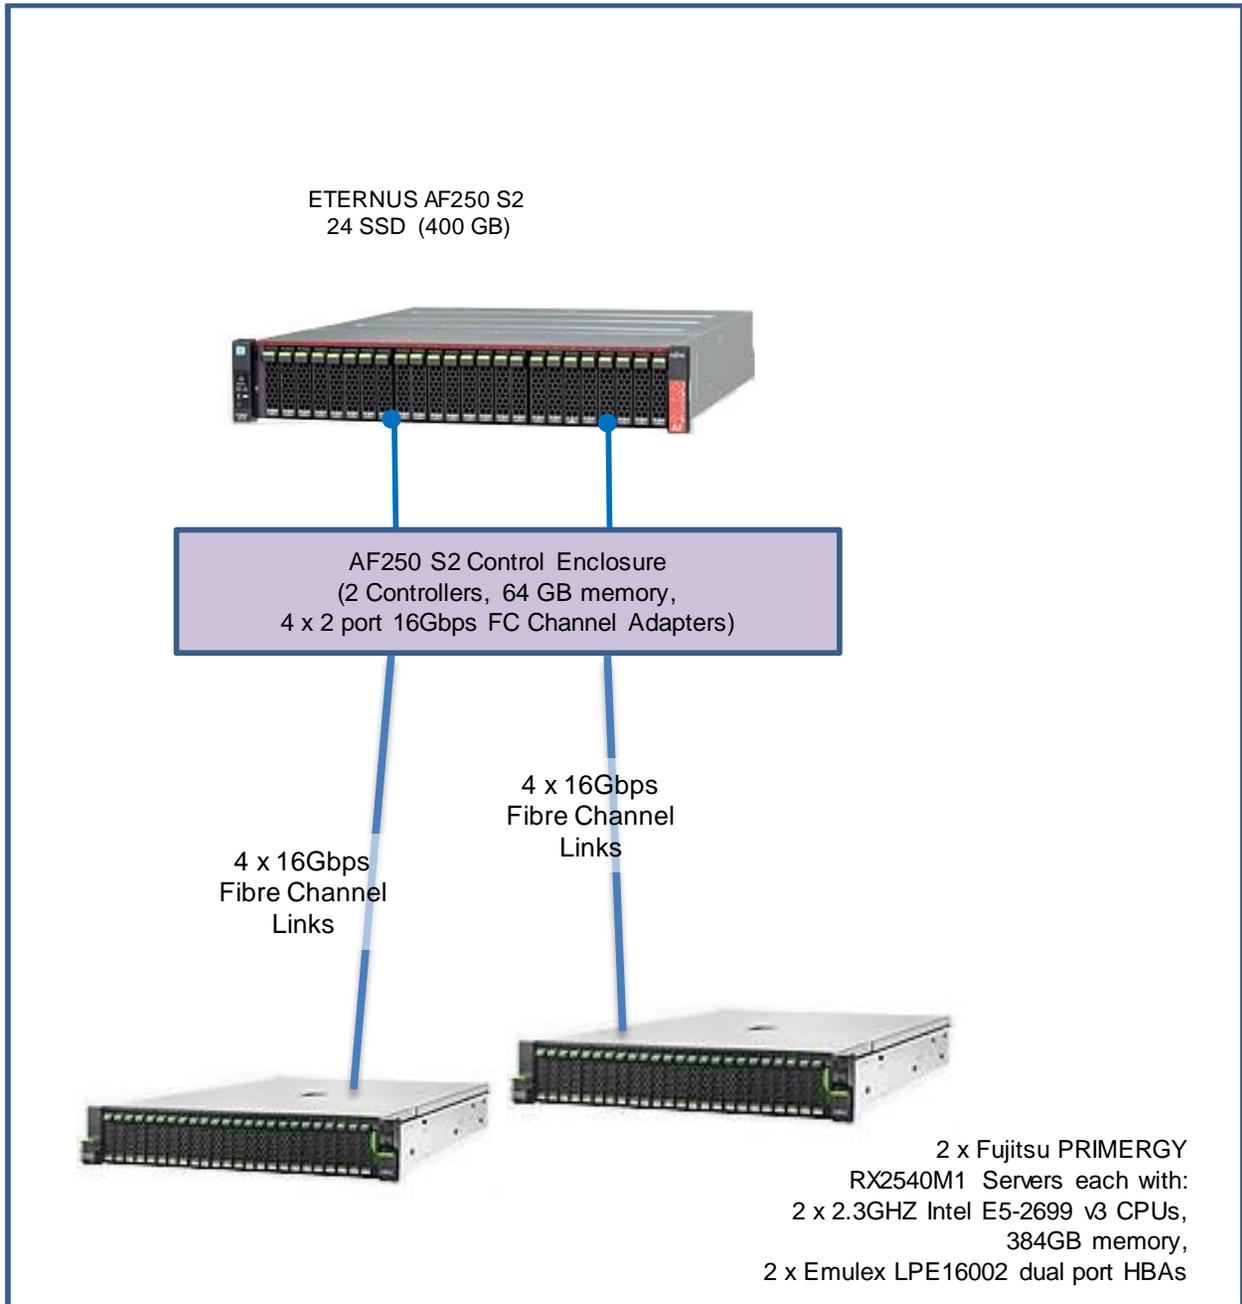

## Tested Storage Product Description

The ETERNUS AF250 S2 is the ideal choice for application scenarios with demanding data and performance requirements. The system delivers impressive IOPS performance with lowest latency even at full load. Thus it offers a solution that resolves all performance issues in critical applications – such as real-time business analytics or VDI environments - without requiring any complicated tuning. It also fits best as general purpose storage for all Tier-1 applications in small and mid-sized companies.

## Priced Storage Configuration Components

<b>4 x Emulex LPE16002 dual port 16 Gb Fibre Channel HBAs</b>
<b>1 x AF250 S2, with:</b> <ul style="list-style-type: none"><li><b>2 x Controller Modules (CM) each with:</b><ul style="list-style-type: none"><li><b>32 GB cache (64 GB total)</b></li></ul></li><li><b>2 x Channel Adapter (CA) with</b><ul style="list-style-type: none"><li><b>2 x 16 Gbps Fibre Channel Host Ports</b></li></ul></li><li><b>24 x 400 GB SSD devices (without Hot Spare)</b></li></ul>

## Storage Configuration Pricing


	Description	Qty	Unit Price	Ext. Price	Disc.	Disc. Price
<b>Hardware</b>						
ET252CU	ETERNUS AF250 S2	1	15,575	15,575	45%	8,596.21
ETVHHFA	Host interface for AF250 S2(16Gbit/s, FC, 4port)	2	3,140	6,280	45%	3,466.08
ETVSAF1	Value SSD(2.5inch) 400GB x1 for AF250 S2	24	1,270	30,480	45%	16,822.63
S26361-F4994-L502	PFC EP LPe16002	4	1,418	5,672	45%	3,130.51
ETFKC05U	AC Power Cords(125V - IEC320-C14, 0.5m)	2	80	160	45%	88.31
61-343827-003	Fibre Channel Host IF Cable LC/LC - 3m	8	132	1,056	45%	582.83
<b>Hardware Subtotal</b>						<b>32,686.57</b>
<b>Support &amp; Maintenance</b>						
	Provide 24 hour per day / 7days per week 4 hour response maintenance for 36 months					
ETAF25-W025360-AED	ETERNUS AF250 Warranty, 36 Months, Standard Level, 9x5 Phone Support, NBD Response	1	0	0	20%	0.00
ETAF25-U004361-AED	ETERNUS AF250 Warranty Uplift, 36 Months, Enhanced Plus Level, 24x7 4hr Onsite, Prepaid billing	1	1,456	1,456	20%	1,164.80
<b>Support &amp; Maintenance Subtotal</b>						<b>1,164.80</b>
<b>SPC-1 Total System Price</b>						<b>33,851.38</b>
SPC-1 IOPS™						360,070
<b>SPC-1 Price-Performance™ (\$/SPC-1 KIOPS™)</b>						<b>94.02</b>
SPC-1 ASU Capacity (GB)						3,435
<b>SPC-1 ASU Price (\$/GB)</b>						<b>9.86</b>

**Discount Details:** The discounts shown are based on the storage capacity purchased and are generally available.

**Warranty:** The 3-year maintenance and support included in the above pricing meets or exceeds a 24x7 coverage with a 4-hour response time.

**Availability Date:** January 23, 2018.

### Response Time and Throughput Graph

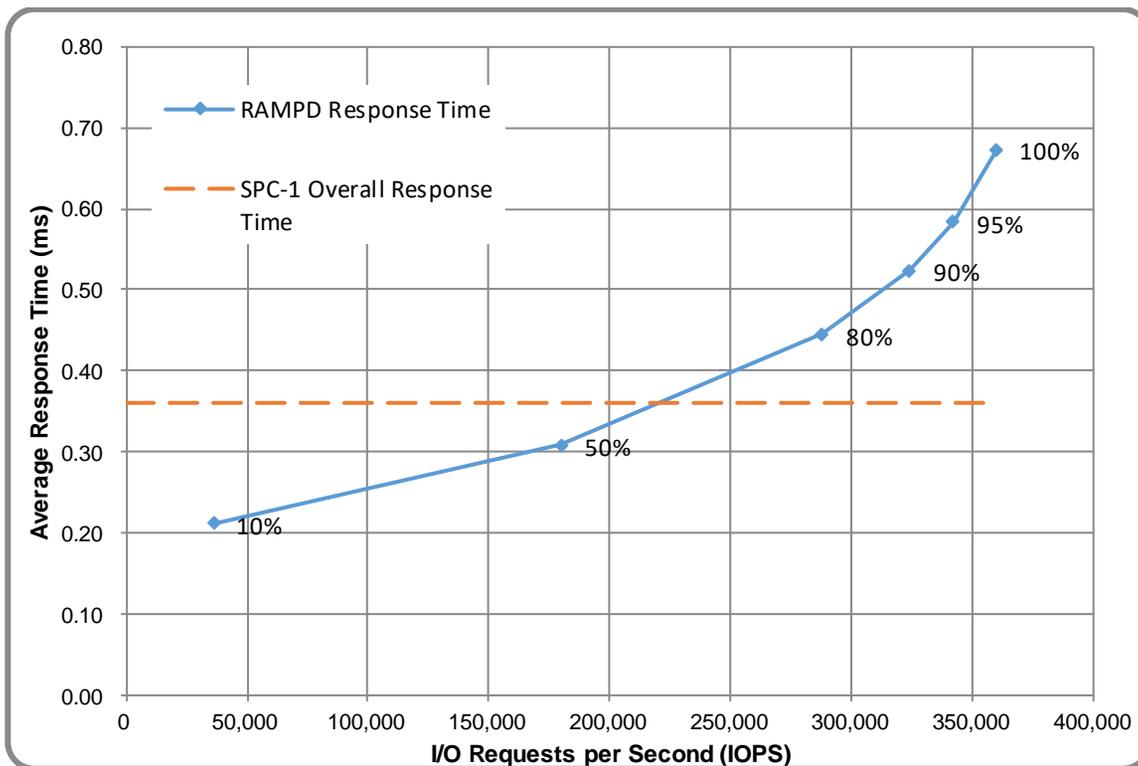


Contact Information	
<b>Test Sponsor Primary Contact</b>	<a href="http://www.fujitsu.com/services/computing/storage">Fujitsu Limited</a> – <a href="http://www.fujitsu.com/services/computing/storage">http://www.fujitsu.com/services/computing/storage</a> Kun Katsumata – <a href="mailto:kkatsumata@us.fujitsu.com">kkatsumata@us.fujitsu.com</a>
<b>SPC Auditor</b>	InfoSizing – <a href="http://www.sizing.com">www.sizing.com</a> Doug Johnson – <a href="mailto:doug@sizing.com">doug@sizing.com</a>

Revision Information	
<b>SPC Benchmark 1™ Revision</b>	V3.5.0
<b>SPC-1 Workload Generator Revision</b>	v 03.00.2551
<b>Publication Revision History</b>	<ul style="list-style-type: none"> <li>• First Edition: November 5, 2017</li> <li>• Second Edition: February 15, 2018                             <ul style="list-style-type: none"> <li>○ Updated SPC-1 Price-Performance™ metric based on SPC-1 v3.6.0 definition.</li> </ul> </li> <li>• Third Edition: April 17, 2018                             <ul style="list-style-type: none"> <li>○ Correct Committed Data Persistence Implementation description.</li> </ul> </li> </ul>

## CONFIGURATION INFORMATION

### **Benchmark Configuration and Tested Storage Configuration**

The following diagram illustrates the Benchmark Configuration (BC), including the Tested Storage Configuration (TSC) and the Host System(s).

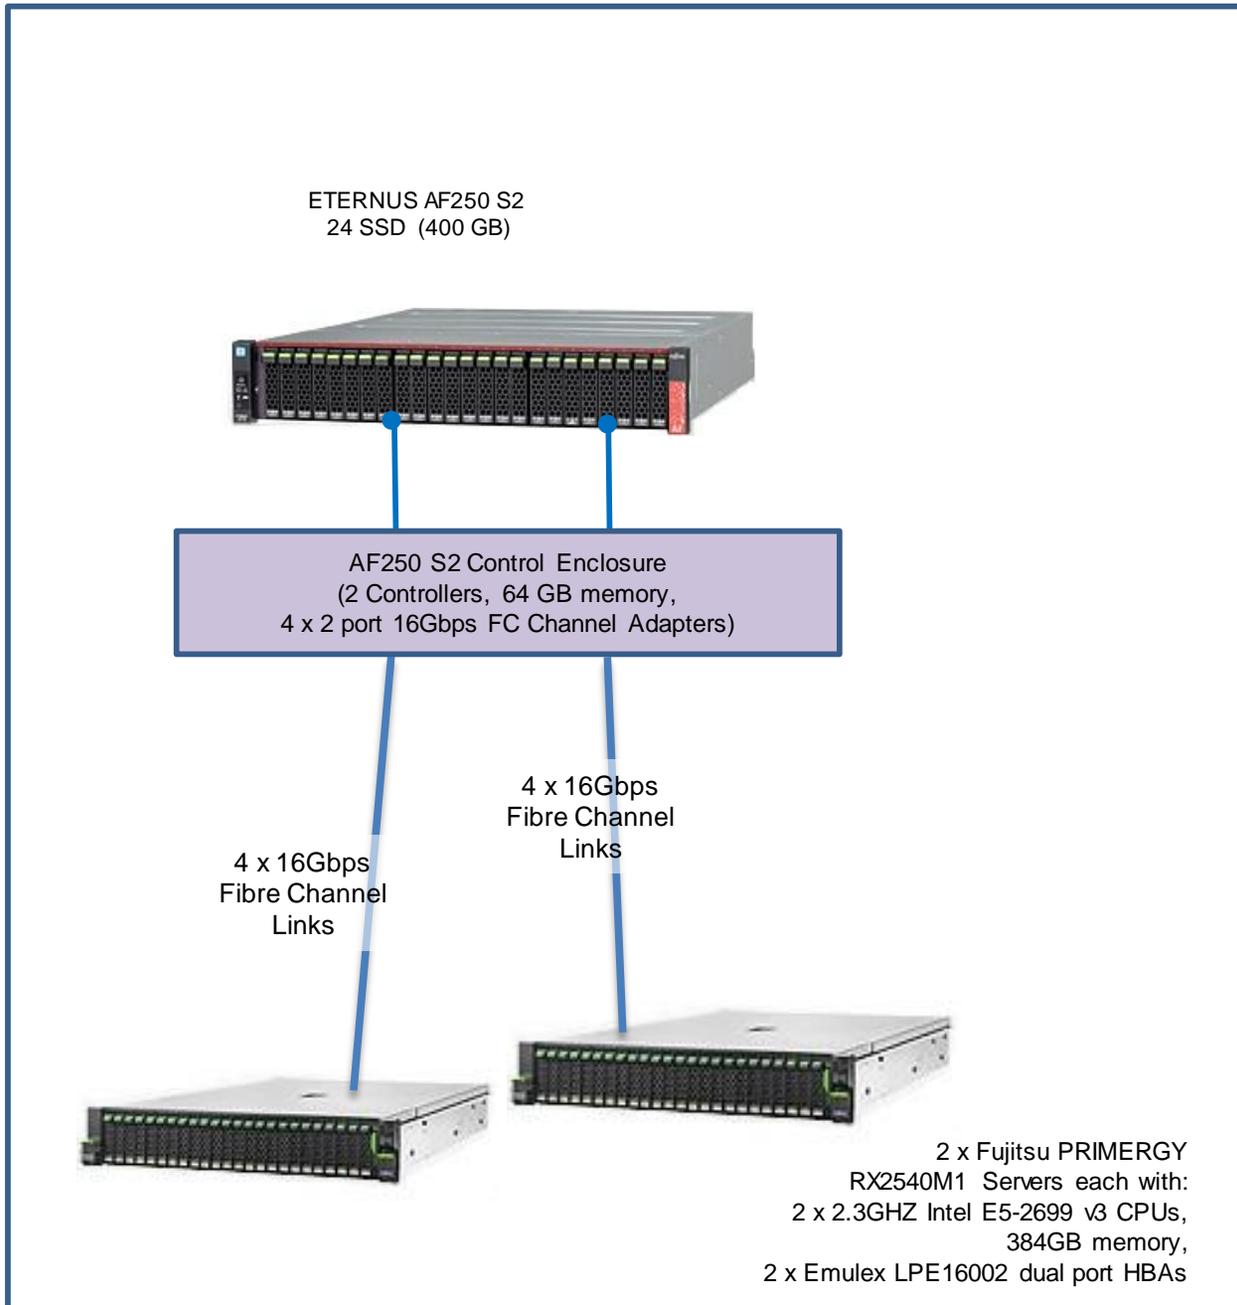

### Storage Network Configuration

The Benchmark Configuration utilized direct-attached storage.

### **Host System and Tested Storage Configuration Components**

The following table lists the components of the Host System(s) and the Tested Storage Configuration (TSC).

<b>Host Systems</b>
2 x Fujitsu PRIMERGY RX2540 M1 Servers, each with : 2 x Intel Xeon E5-2600V3 (2.3 GHz, 36 Cores, 45 MB L3) 384 GB Main Memory Red Hat Enterprise Linux Server release 6.5
<b>Tested Storage Configuration</b>
<b>4 x Emulex LPE16002 dual port 16 Gb Fibre Channel HBAs</b>
1 x AF250 S2, with: 2 x Controller Modules (CM) each with: 32 GB cache (64 GB total) 2 x Channel Adapter (CA) with 2 x 16 Gbps Fibre Channel Host Ports 24 x 400 GB SSD devices (without Hot Spare)

### **Differences Between Tested and Priced Storage Configurations**

There were no differences between the Tested Storage Configuration and the Priced Storage Configuration.

### **Component Changes in Revised Full Disclosure Report**

The following table outlines component changes that were made in revisions to this Full Disclosure Report.

<b>Original Component</b>	<b>Revised Component</b>	<b>Description of Change</b>
n/a	n/a	Initial submission

## Benchmark Configuration Creation Process

### Customer Tuning Parameters and Options

All the customer tuning parameters and options that have been altered from their default values for this benchmark are included in Appendix C and in the Supporting Files (see Appendix A).

### Tested Storage Configuration Creation

A detailed description of how the logical representation of the TSC was created is included in Appendix D and in the Supporting Files (see Appendix A).

### Tested Storage Configuration Inventory

An inventory of the components in the TSC, as seen by the Benchmark Configuration, is included in Appendix E and in the Supporting Files (see Appendix A).

### Workload Generator Storage Configuration

The SPC-1 Workload Generator storage configuration commands and parameters used to invoke the execution of the tests are included in Appendix F and in the Supporting Files (see Appendix A).

### Logical Volume Capacity and ASU Mapping

The following table details the capacity of each ASU and how they are mapped to logical volumes (LV).

	LV per ASU	LV Capacity	Used per LV	Total per ASU	% ASU Capacity
ASU-1	1	2,121	1,545	1,545	45.0%
ASU-2	1	2,121	1,545	1,545	45.0%
ASU-3	1	471	346	346	10.1%
<b>SPC-1 ASU Capacity</b>				<b>3,435</b>	

### Physical Storage Capacity and Utilization

The following table details the Physical Capacity of the storage devices and the Physical Capacity Utilization (percentage of Total Physical Capacity used) in support of hosting the ASUs.

Devices	Count	Physical Capacity	Total Capacity
400 GB SSD	24	400.0	9,600.0
<b>Total Physical Capacity</b>			<b>9,600</b>
<b>Physical Capacity Utilization</b>			<b>35.78%</b>

### Data Protection

The data protection level used for all logical volumes was **Protected 2 (RAID1)**, which was accomplished by configuring dual controllers, dual power, dual fans and RAID1 device protection.

## BENCHMARK EXECUTION RESULTS

This portion of the Full Disclosure Report documents the results of the various SPC-1 Tests, Test Phases, and Test Runs.

### Benchmark Execution Overview

#### Workload Generator Input Parameters

The SPC-1 Workload Generator commands and input parameters for the Test Phases are presented in the Supporting Files (see Appendix A).


#### Primary Metrics Test Phases

The benchmark execution consists of the Primary Metrics Test Phases, including the Test Phases SUSTAIN, RAMPD\_100 to RAMPD\_10, RAMPU\_50 to RAMPU\_100, RAMP\_0, REPEAT\_1 and REPEAT\_2.

Each Test Phase starts with a transition period followed by a Measurement Interval.

#### Measurement Intervals by Test Phase Graph

The following graph presents the average IOPS and the average Response Times measured over the Measurement Interval (MI) of each Test Phase.

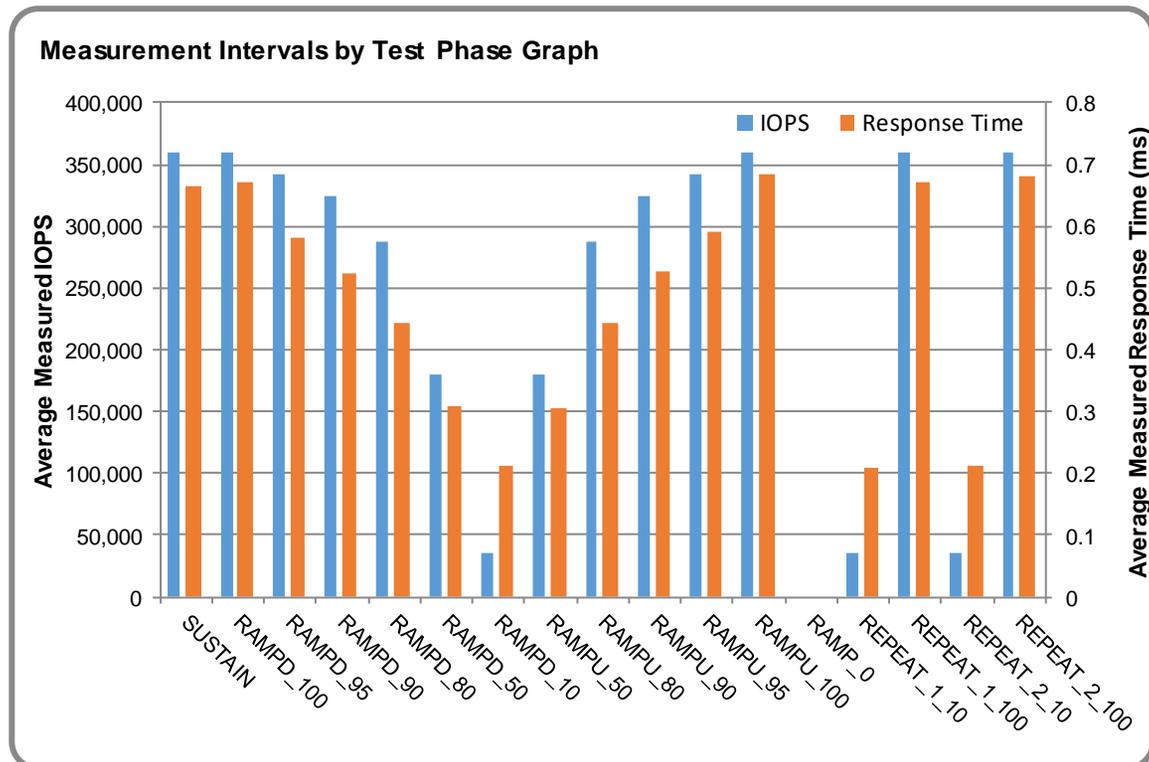

#### Exception and Waiver

During the course of the benchmark audit, no exceptions were encountered and no benchmark requirements were waived.

## SUSTAIN Test Phase

### SUSTAIN – Results File


The results file generated during the execution of the SUSTAIN Test Phase is included in the Supporting Files (see Appendix A) as follows:

- SPC1\_METRICS\_0\_Raw\_Results.xlsx


### SUSTAIN – Execution Times

Interval	Start Date & Time	End Date & Time	Duration
Transition Period	30-Oct-17 07:36:02	30-Oct-17 16:36:02	9:00:00.000
Measurement Interval	30-Oct-17 16:36:02	31-Oct-17 00:36:03	8:00:01.000


### SUSTAIN – Throughput Graph

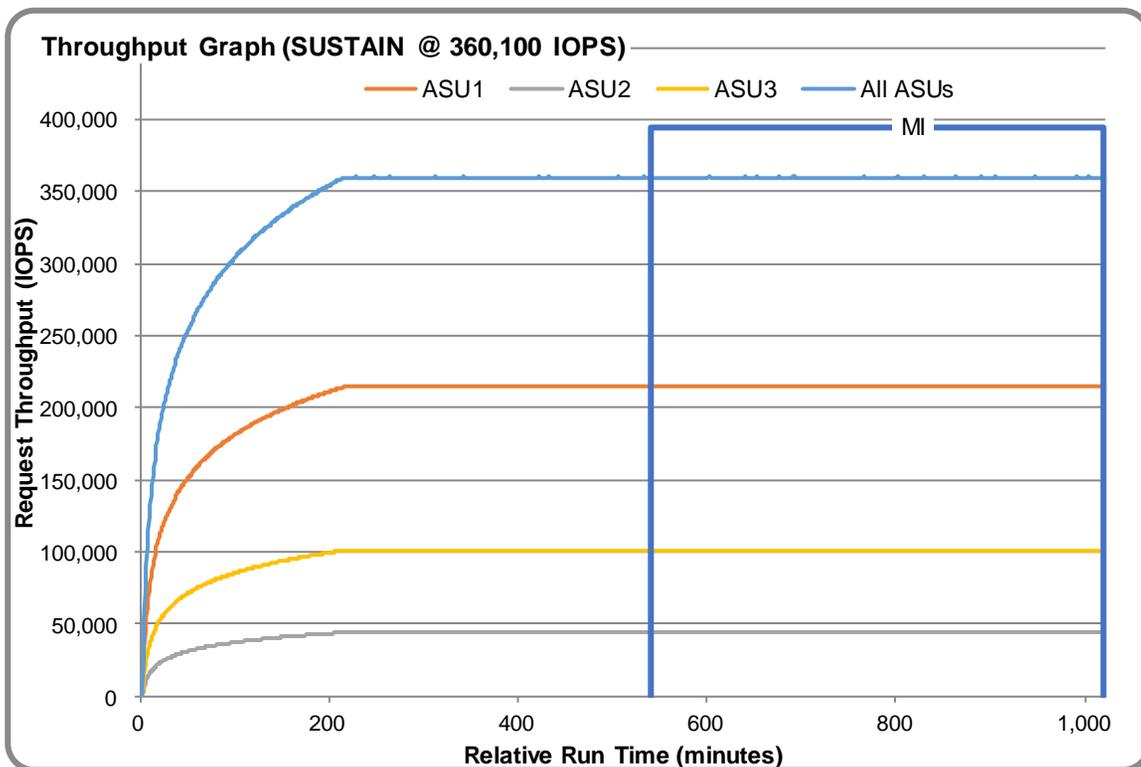


### SUSTAIN – Response Time Graph

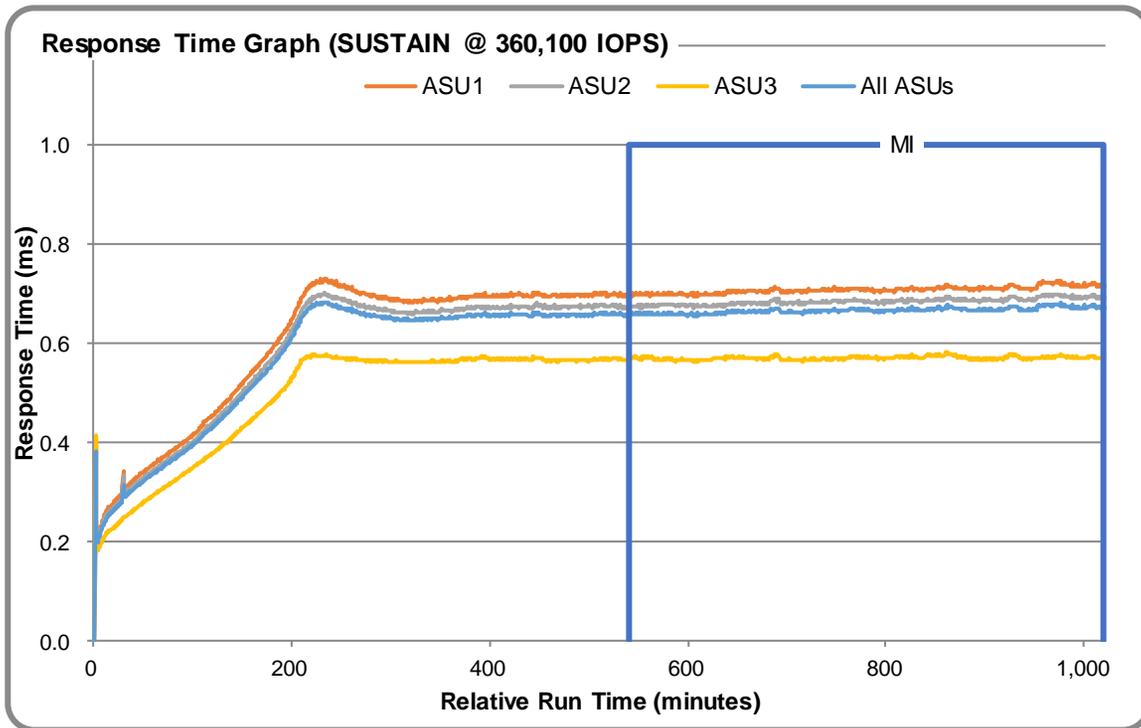

### SUSTAIN – Data Rate Graph

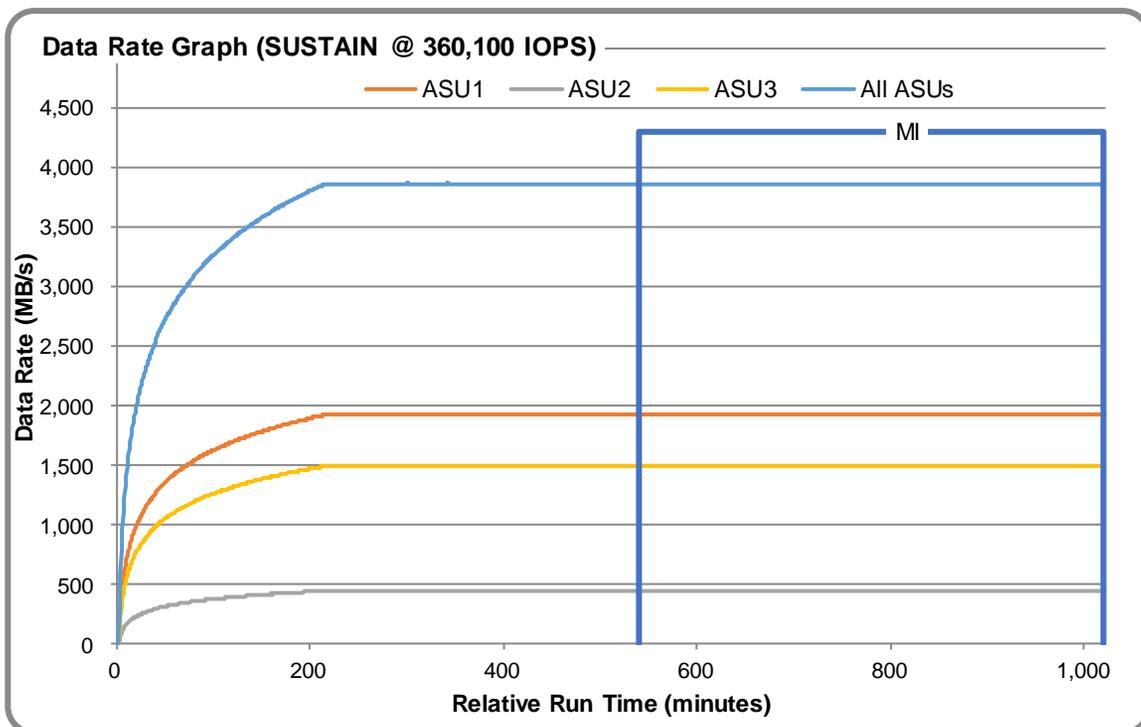

## SUSTAIN – Response Time Frequency Graph

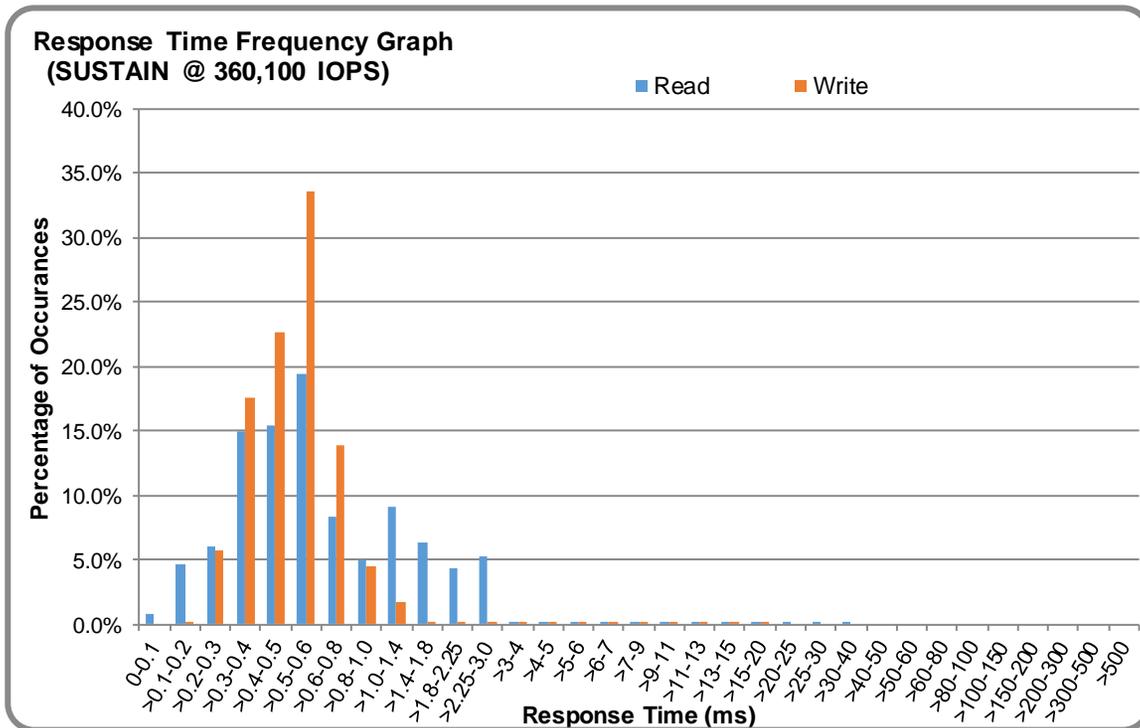

## SUSTAIN – Intensity Multiplier

The following table lists the targeted intensity multiplier (Defined), the measured intensity multiplier (Measured) for each I/O STREAM, its coefficient of variation (Variation) and the percentage of difference (Difference) between Target and Measured.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>Defined</b>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
<b>Measured</b>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
<b>Variation</b>	0.0011	0.0003	0.0007	0.0004	0.0016	0.0008	0.0010	0.0003
<b>Difference</b>	0.005%	0.004%	0.002%	0.001%	0.007%	0.005%	0.015%	0.001%

## RAMPD\_100 Test Phase

### RAMPD 100 – Results File


The results file generated during the execution of the RAMPD\_100 Test Phase is included in the Supporting Files (see Appendix A) as follows:

- SPC1\_METRICS\_0\_Raw\_Results.xlsx


### RAMPD 100 – Execution Times

Interval	Start Date & Time	End Date & Time	Duration
Transition Period	31-Oct-17 00:37:02	31-Oct-17 00:40:03	0:03:01.000
Measurement Interval	31-Oct-17 00:40:03	31-Oct-17 00:50:03	0:10:00.000


### RAMPD 100 – Throughput Graph

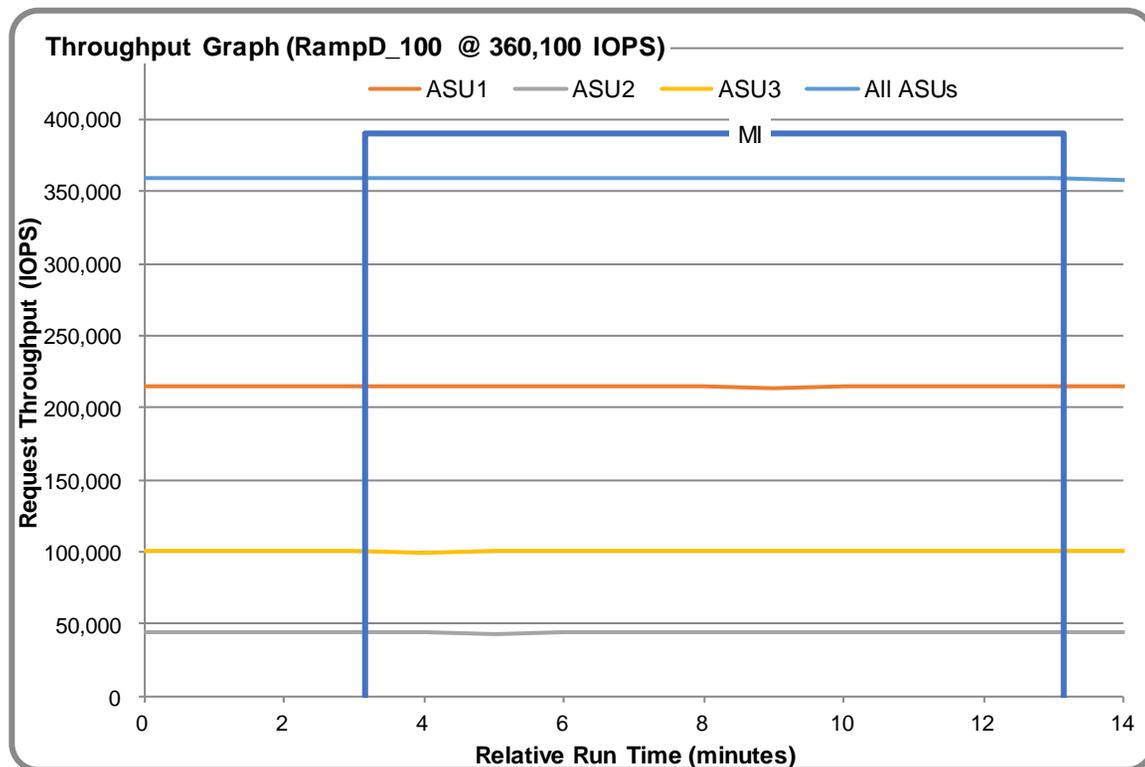


### RAMPD 100 – Response Time Graph

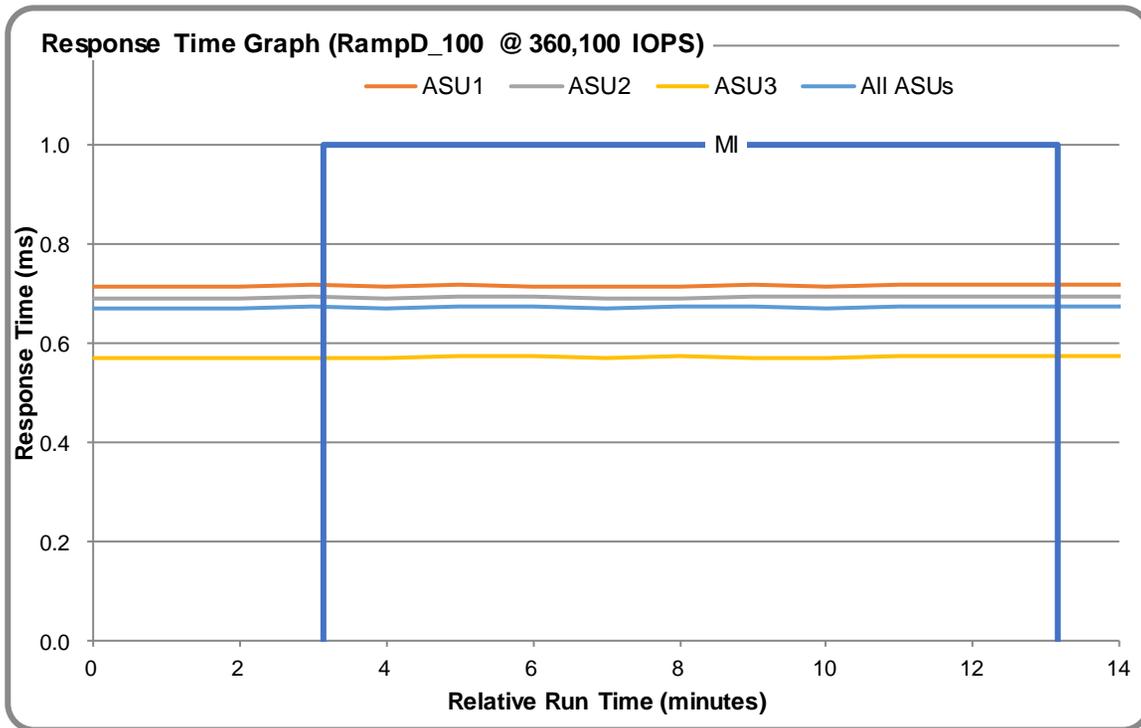

### RAMPD 100 – Data Rate Graph

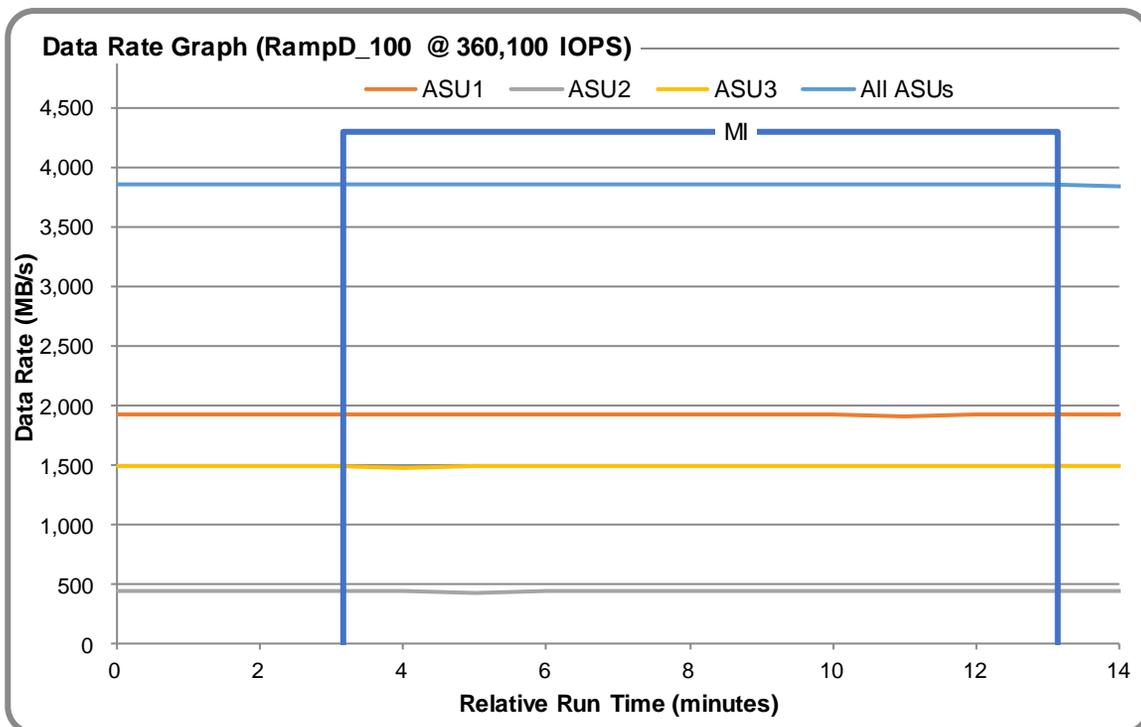

## RAMPD 100 – Response Time Frequency Graph

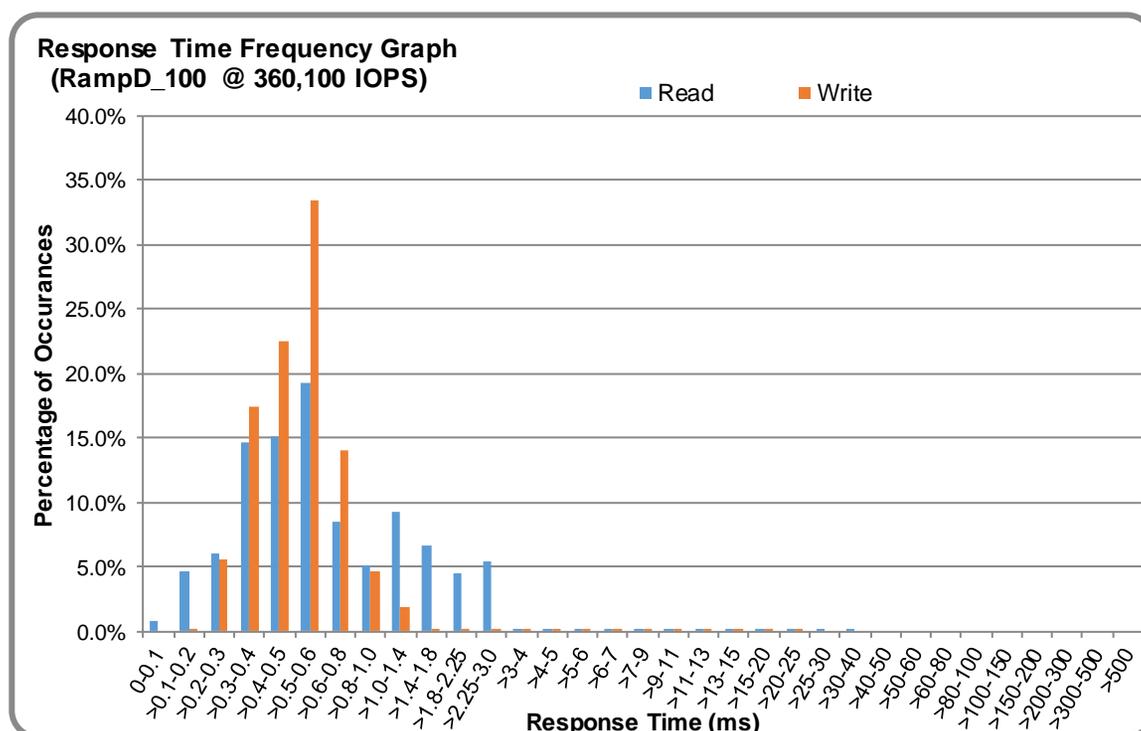

## RAMPD 100 – Intensity Multiplier

The following table lists the targeted intensity multiplier (Defined), the measured intensity multiplier (Measured) for each I/O STREAM, its coefficient of variation (Variation) and the percentage of difference (Difference) between Target and Measured.

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>Defined</b>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
<b>Measured</b>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2811
<b>Variation</b>	0.0010	0.0004	0.0008	0.0004	0.0017	0.0008	0.0007	0.0004
<b>Difference</b>	0.028%	0.008%	0.000%	0.018%	0.004%	0.031%	0.019%	0.028%

## RAMPD 100 – I/O Request Summary

<b>I/O Requests Completed in the Measurement Interval</b>	216,041,400
<b>I/O Requests Completed with Response Time &lt;= 30 ms</b>	216,041,353
<b>I/O Requests Completed with Response Time &gt; 30 ms</b>	47

## Response Time Ramp Test

### Response Time Ramp Test – Results File


The results file generated during the execution of the Response Time Ramp Test is included in the Supporting Files (see Appendix A) as follows:

- **SPC1\_METRICS\_0\_Raw\_Results.xlsx**


### Response Time Ramp Test – Phases

The Response Time Ramp Test is comprised of 11 Test Phases, including six Ramp-Down Phases (executed at 100%, 95%, 90%, 80%, 50%, and 10% of the Business Scaling Unit) and five Ramp-Up Phases (executed at 50%, 80%, 90%, 95%, and 100% of the Business Scaling Unit).


### Response Time Ramp Test – Average Throughput Graph

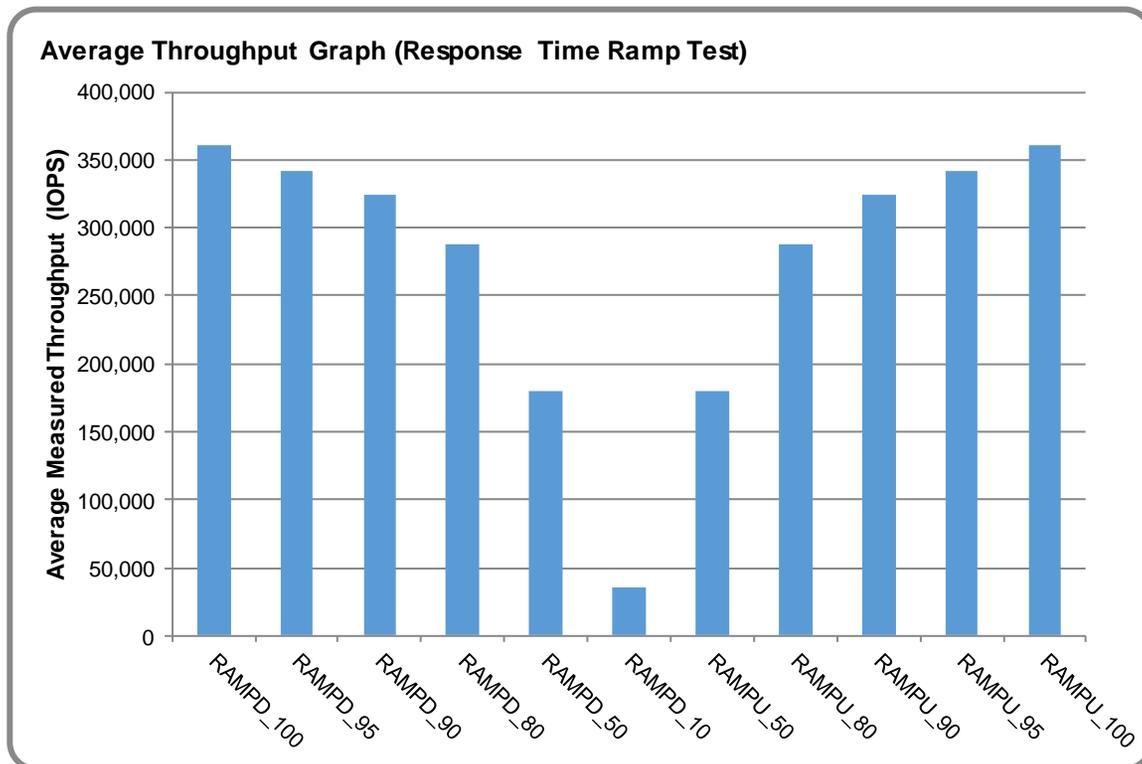

### Response Time Ramp Test – Average Response Time Graph

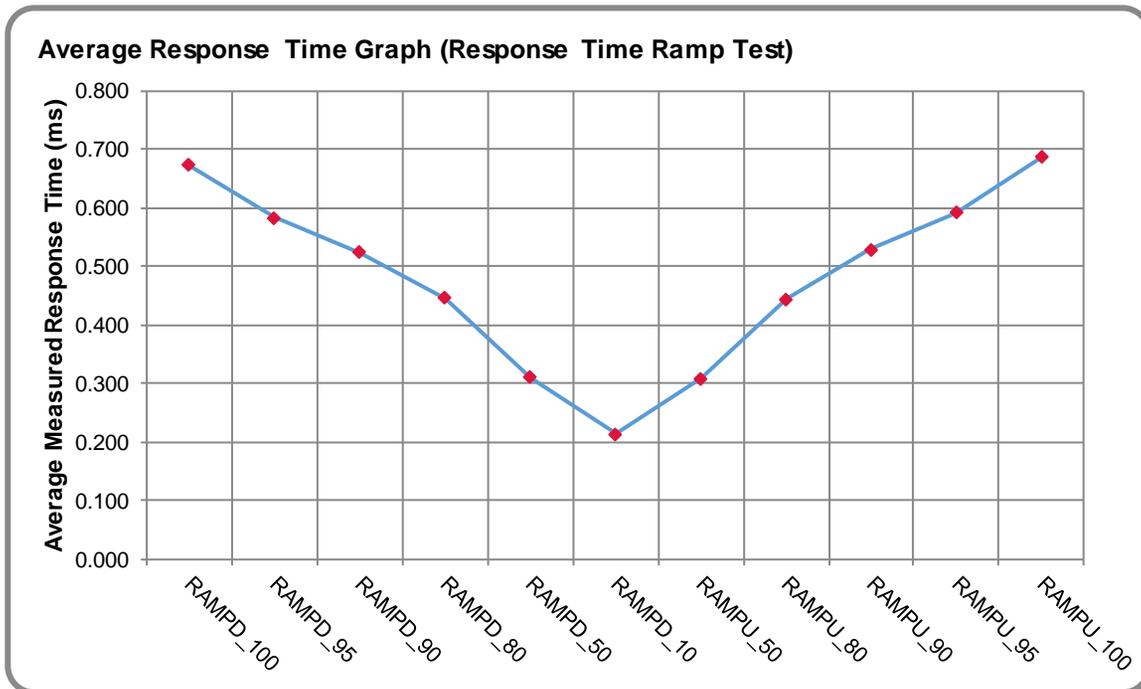

### Response Time Ramp Test – RAMPD 10 Response Time Graph

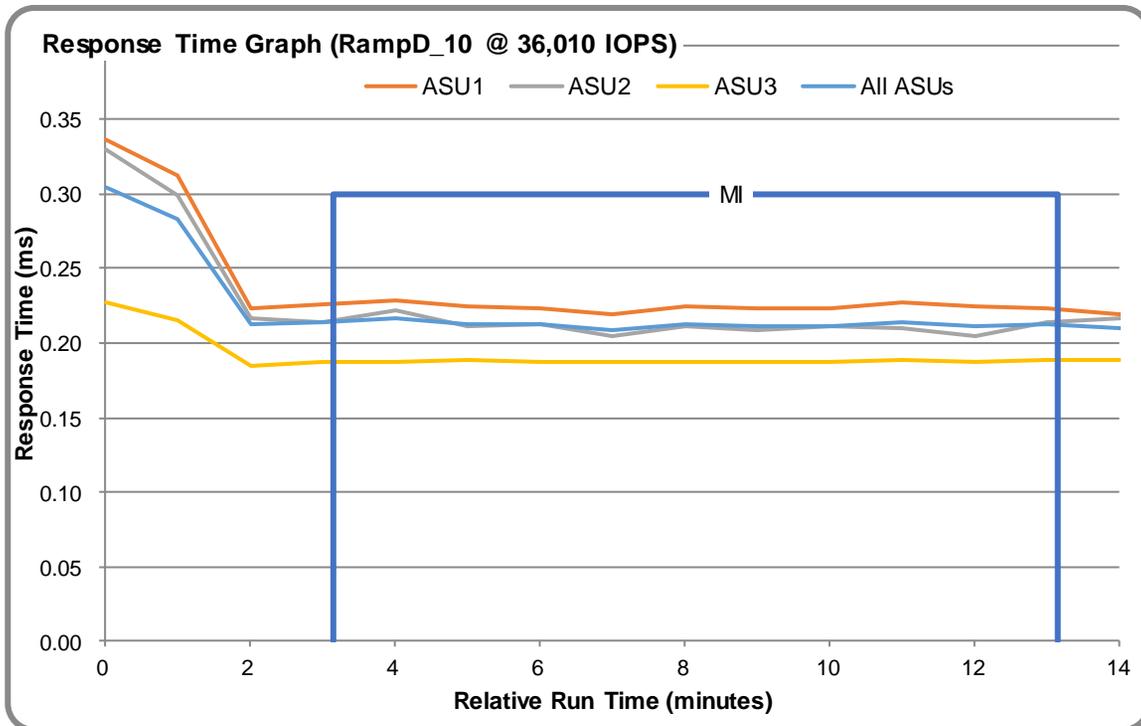

## Repeatability Test

### Repeatability Test Results File

The results file generated during the execution of the Repeatability Test is included in the Supporting Files (see Appendix A) as follows:


- **SPC1\_METRICS\_0\_Raw\_Results.xlsx**

### Repeatability Test Results


The throughput measurements for the Response Time Ramp Test (RAMPD) and the Repeatability Test Phases (REPEAT\_1 and REPEAT\_2) are listed in the tables below.

Test Phase	100% IOPS	10% IOPS
RAMPD	360,070.2	36,003.8
REPEAT_1	360,116.0	36,013.0
REPEAT_2	360,104.2	36,012.7


### REPEAT 1 100 – Throughput Graph

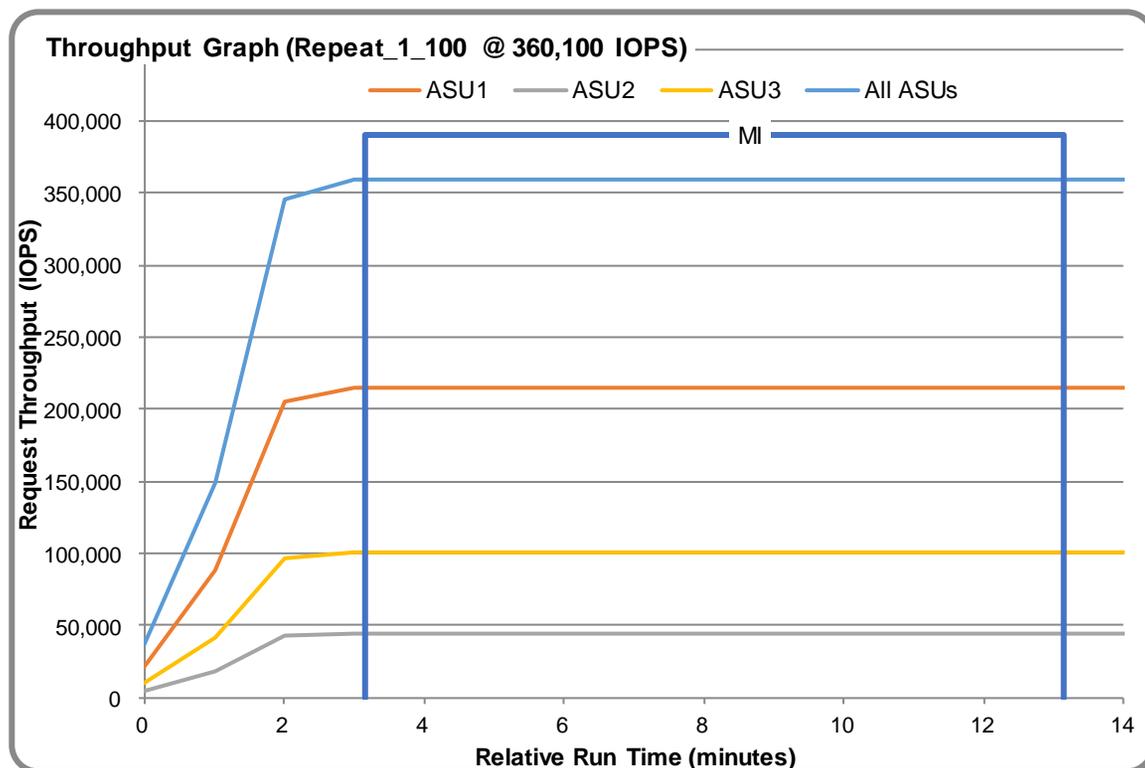


### REPEAT 1 100 – Response Time Graph

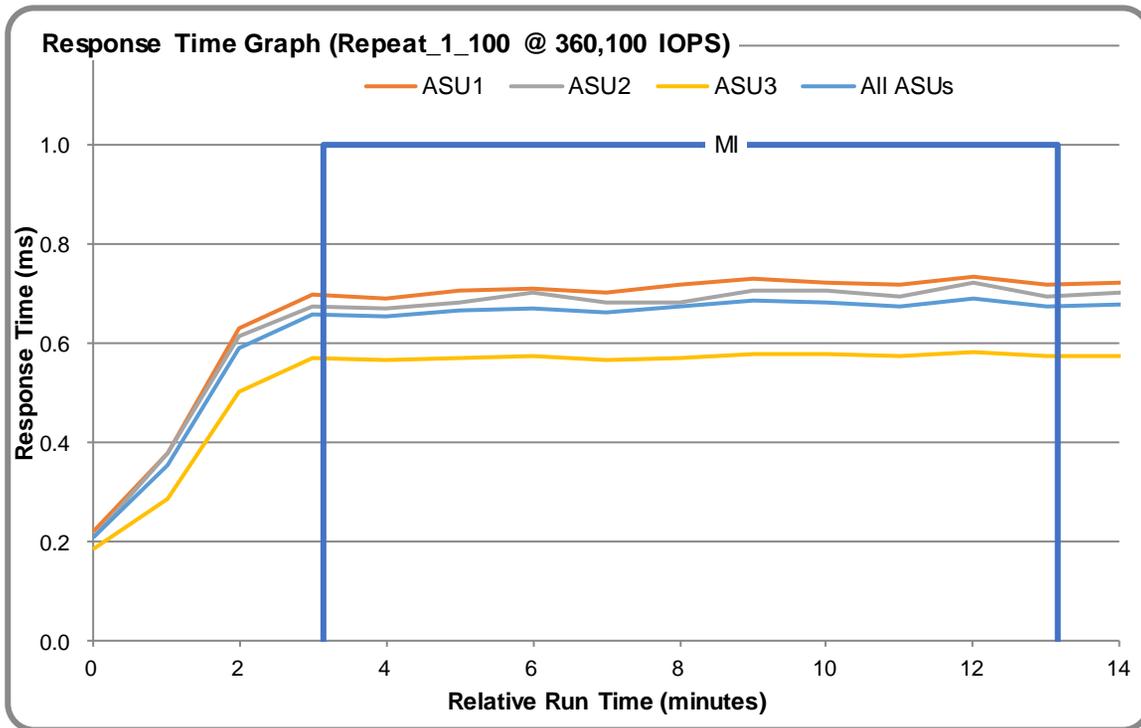

### REPEAT 2 100 – Throughput Graph

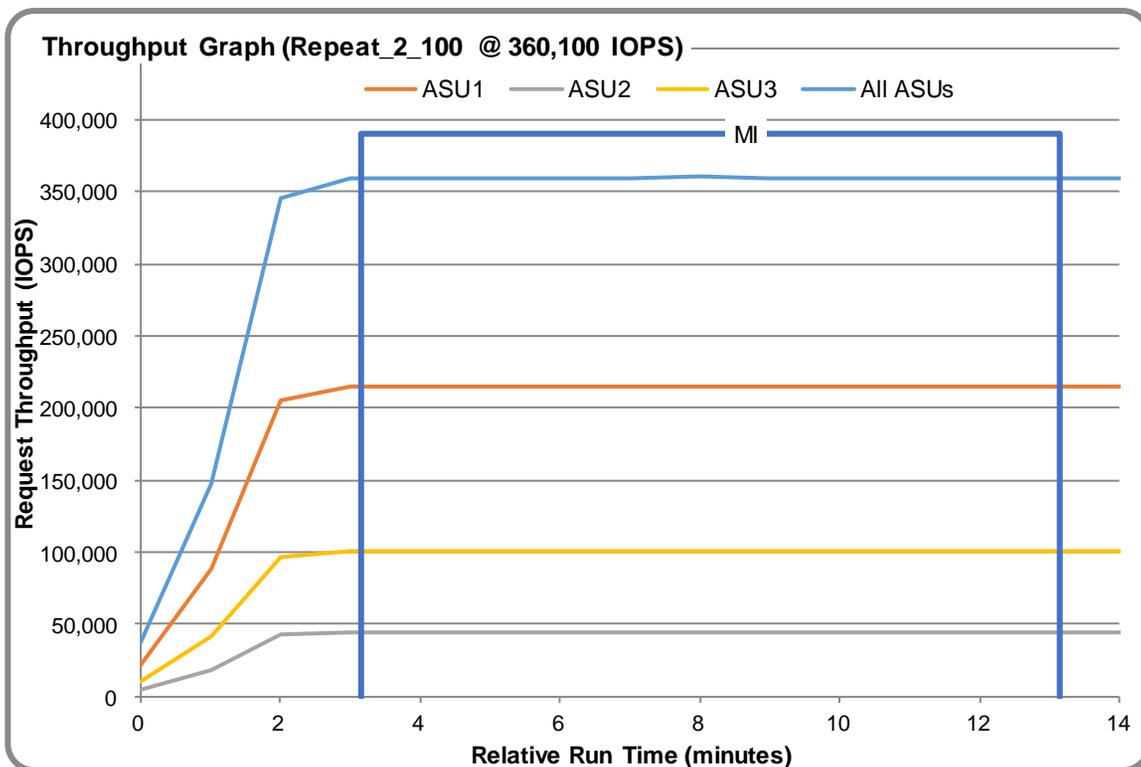

### REPEAT 2 100 – Response Time Graph

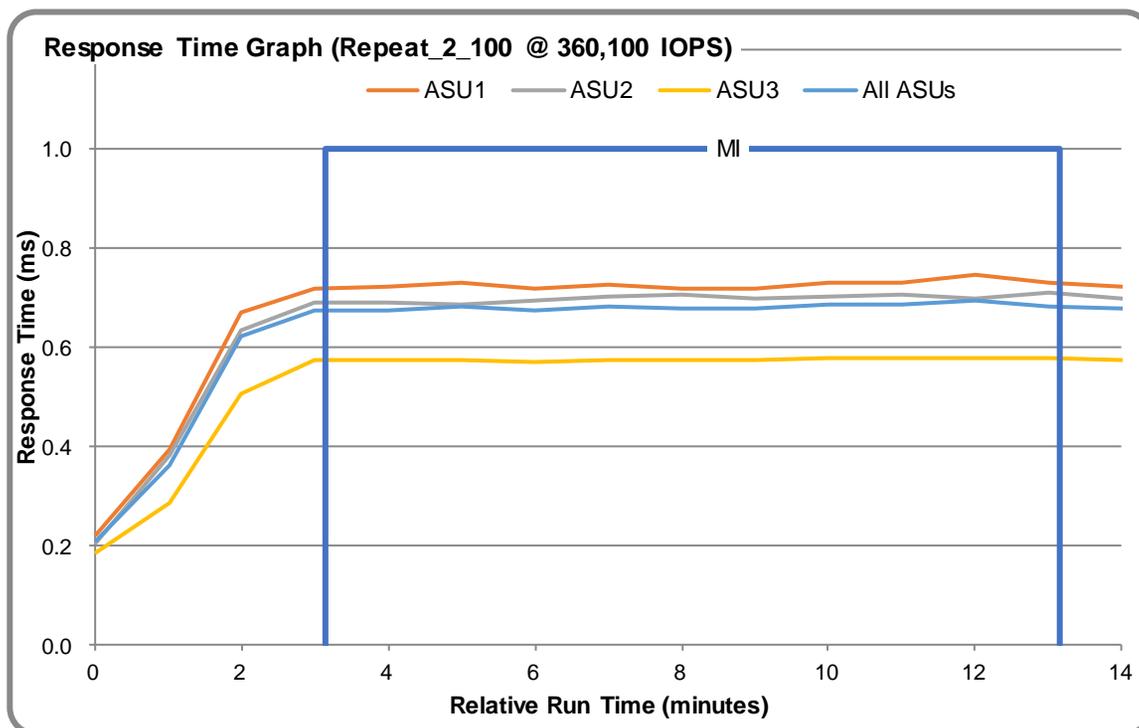

### Repeatability Test – Intensity Multiplier

The following tables lists the targeted intensity multiplier (Defined), the measured intensity multiplier (Measured) for each I/O STREAM, its coefficient of variation (Variation) and the percent of difference (Difference) between Target and Measured.

#### REPEAT\_1\_100 Test Phase

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>Defined</b>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
<b>Measured</b>	0.0350	0.2810	0.0700	0.2101	0.0180	0.0700	0.0350	0.2810
<b>Variation</b>	0.0010	0.0003	0.0006	0.0005	0.0015	0.0008	0.0010	0.0004
<b>Difference</b>	0.004%	0.000%	0.018%	0.037%	0.028%	0.013%	0.059%	0.010%

#### REPEAT\_2\_100 Test Phase

	ASU1-1	ASU1-2	ASU1-3	ASU1-4	ASU2-1	ASU2-2	ASU2-3	ASU3-1
<b>Defined</b>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
<b>Measured</b>	0.0350	0.2810	0.0700	0.2100	0.0180	0.0700	0.0350	0.2810
<b>Variation</b>	0.0008	0.0002	0.0008	0.0005	0.0012	0.0008	0.0012	0.0004
<b>Difference</b>	0.049%	0.002%	0.021%	0.011%	0.017%	0.009%	0.031%	0.004%

## Data Persistence Test

### Data Persistence Test Results file

The results files generated during the execution of the Data Persistence Test is included in the Supporting Files (see Appendix A) as follows:

- **SPC1\_PERSIST\_1\_0\_Raw\_Results.xlsx**
- **SPC1\_PERSIST\_2\_0\_Raw\_Results.xlsx**

### Data Persistence Test Execution

The Data Persistence Test was executed using the following sequence of steps:

- The PERSIST\_1\_0 Test Phase was executed to completion.
- The Benchmark Configuration was taken through an orderly shutdown process and powered off.
- The Benchmark Configuration was powered on and taken through an orderly startup process.
- The PERSIST\_2\_0 Test Phase was executed to completion.

### Data Persistence Test Results

<b>Data Persistence Test Phase: Persist1</b>	
<b>Total Number of Logical Blocks Written</b>	44,546,290
<b>Total Number of Logical Blocks Verified</b>	22,526,100
<b>Total Number of Logical Blocks Overwritten</b>	22,020,190
<b>Total Number of Logical Blocks that Failed Verification</b>	0
<b>Time Duration for Writing Test Logical Blocks (sec.)</b>	300
<b>Size in bytes of each Logical Block</b>	8,192
<b>Number of Failed I/O Requests in the process of the Test</b>	0

### Committed Data Persistence Implementation

ETERNUS AF250S2 guarantee data persistence as follows: If power supply fails ETERNUS AF250S2 automatically evacuates controller cache placing data in nonvolatile SSD device called BUD (Boot up and Utility Device). The Battery Backup Unit (BBU) provides sufficient power to ensure all modified cache data is evacuated to BUD successfully. Then the BUD memory protects the data indefinitely.

## APPENDIX A: SUPPORTING FILES

The following table details the content of the Supporting Files provided as part of this Full Disclosure Report.

File Name	Description	Location
<b>/SPC1_RESULTS</b>	<b>Data reduction worksheets</b>	<b>root</b>
SPC1_INIT_0_Raw_Results.xlsx	Raw results for INIT Test Phase	/SPC1_RESULTS
SPC1_METRICS_0_Quick_Look.xlsx	Quick Look Test Run Overview	/SPC1_RESULTS
SPC1_METRICS_0_Raw_Results.xlsx	Raw results for Primary Metrics Test	/SPC1_RESULTS
SPC1_METRICS_0_Summary_Results.xlsx	Primary Metrics Summary	/SPC1_RESULTS
SPC1_PERSIST_1_0_Raw_Results.xlsx	Raw results for PERSIST1 Test Phase	/SPC1_RESULTS
SPC1_PERSIST_2_0_Raw_Results.xlsx	Raw results for PERSIST2 Test Phase	/SPC1_RESULTS
SPC1_Run_Set_Overview.xlsx	Run Set Overview Worksheet	/SPC1_RESULTS
SPC1_VERIFY_0_Raw_Results.xlsx	Raw results for first VERIFY Test Phase	/SPC1_RESULTS
SPC1_VERIFY_1_Raw_Results.xlsx	Raw results for second VERIFY Test Phase	/SPC1_RESULTS
<b>/C_Tuning</b>	<b>Tuning parameters and options</b>	<b>root</b>
All tuning done via GUI (see Appendix C)		
<b>/D_Creation</b>	<b>Storage configuration creation</b>	<b>root</b>
doFDRcfg.sh	Shell script to configure the array	/D_Creation
AF250S2_20170809S24.exp	Configuration CLI expect script	/D_Creation
showFormatStatus.exp	Check for physical format progress	/D_Creation
AF250S2_20170809makeLV.sh	Linux LVM configuration script	/D_Creation
<b>/E_Inventory</b>	<b>Configuration inventory</b>	<b>root</b>
log_BeforeF_JX171030070046.zlg_001.txt	Configuration details before the run	/E_Inventory
log_AfterJ_JX171030070046.zlg_001.txt	Configuration details after the run	/E_Inventory
<b>/F_Generator</b>	<b>Workload generator</b>	<b>root</b>
SPC1.AF250S2_20170809S24.asu	ASU configuration file	/F_generator
SPC1.AF250S2_20170809S24.hst	Host configuration file	
doFDRall_1XV.sh	Master execution control script part 1	
doFDRall_2H.sh	Master execution control script part 2	
exportLog.exp	Exports log file from storage array	

## **APPENDIX B: THIRD PARTY QUOTATION**


All components are directly available through the Test Sponsor.

## APPENDIX C: TUNING PARAMETERS AND OPTIONS

The standard Fujitsu GUI was used to apply the Tuning options for this test.

1. In order to execute some of the commands listed below it is necessary to create an user account with maintainer role. Please create such user account and login with the new account.
2. Change DCMF (Disk Command Multiplication Factor) value from the default (1) to (10) for all RAID Groups.


The following GUI screen (RAID Group -> Tuning -> Modify RAID Group Parameter) is used for each RAID Group and the DCMF parameter is changed to 10 as highlighted in red frame below:

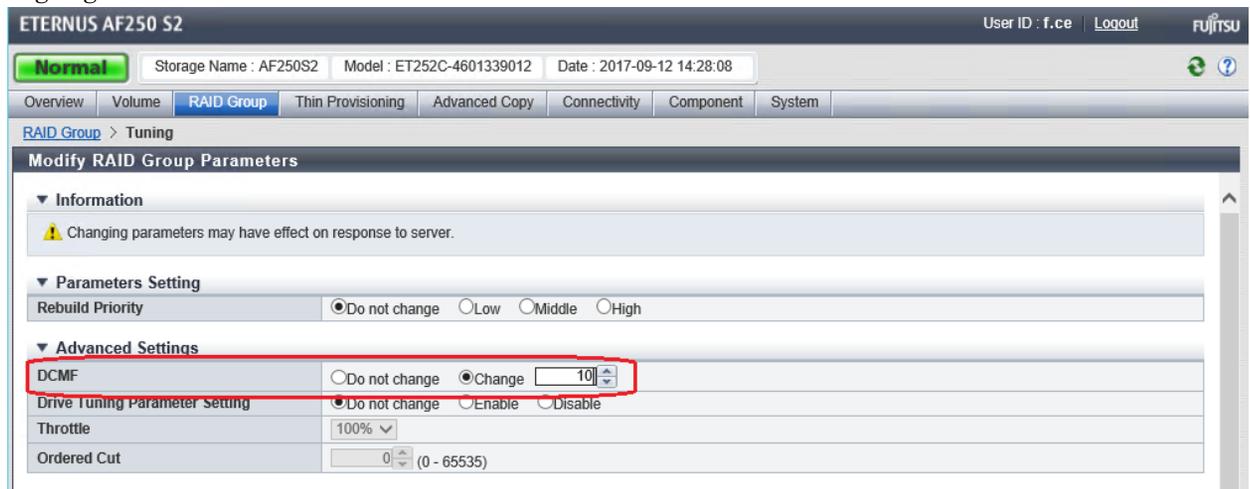

3. Disable Debug Trace

The following GUI setting was applied.

System-> System Settings -> Setup Debug Mode: The Master Trace Level was set to Off (Default: Standard)

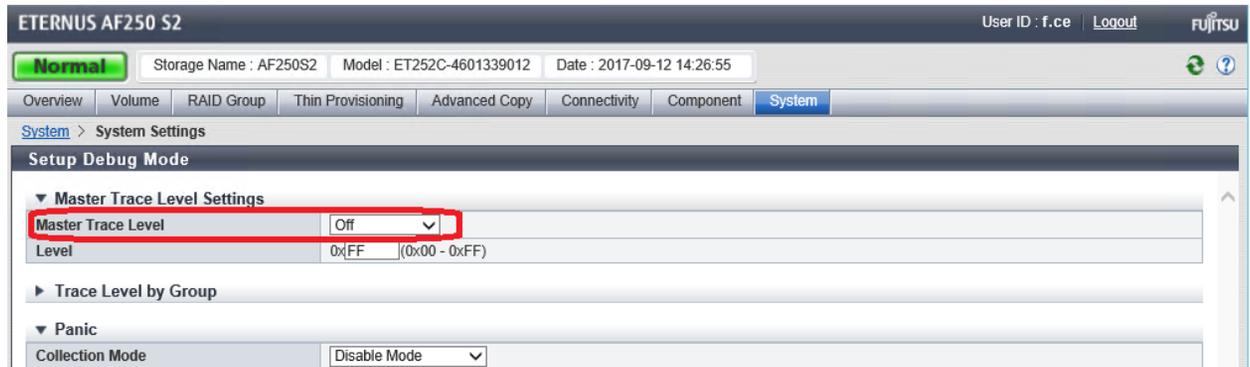


4. Disable Read Sequential/Write Sequential

The following GUI setting was applied.

System-> System Settings -> Setup Subsystem Parameters:

Flexible Write Through was set to Disable (Default: Enable)

Read Sequential/Write Sequential was set to Disable (Default: Enable)

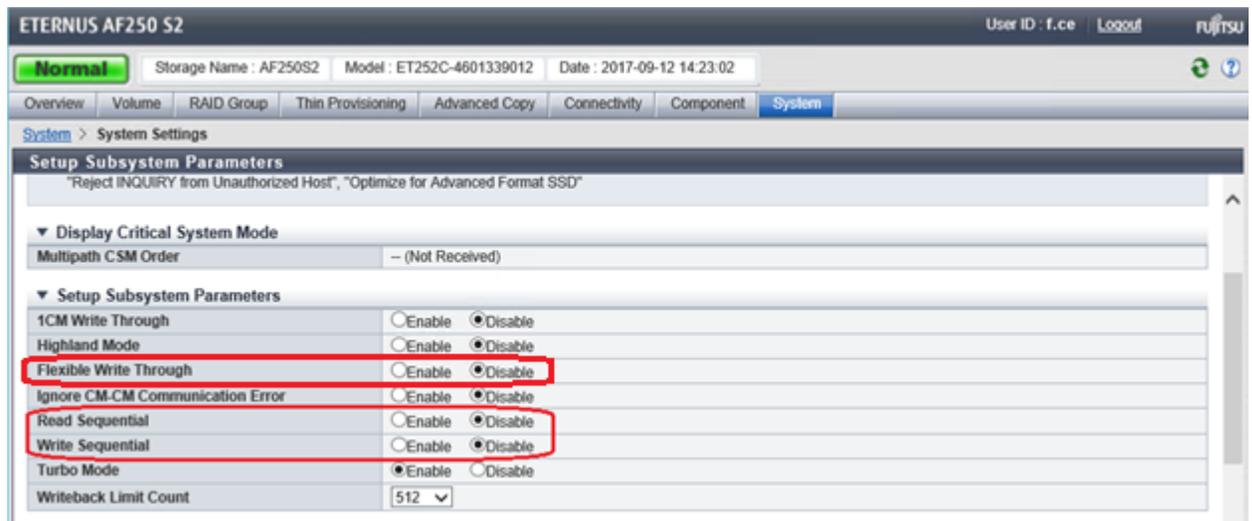

## **APPENDIX D: STORAGE CONFIGURATION CREATION**

The standard Fujitsu Command Line tool (CLI) was used to create the ETERNUS DX200 S4 SPC-1 configuration.

The 'master' script, **doFDRcfg.sh**, was executed, which in turn, invoked the script, **AF250S2\_20170809S24.exp**. The 'master' script included shell commands to monitor the progress as the physical formatting proceeded, which used the **expect** script **showFormatStatus.exp** to pick up the status information from the array.

The **AF250S2\_20170809S24.exp** script completed steps 1-4, described below for the 16 host port configuration.

Each **expect** script included the **docli** procedure, which was used to issue the CLI commands to the array. That procedure used **ssh** for communication with the array. A second procedure in the script, **doexit**, was used to conclude the execution sequence at the end of the script.

### **Step 1 – Creation of RAID Groups**

A total of 12 RAID Groups were created, according to the configuration plan, **ConfigurationDesign\_AF250S2\_20170809.xlsx**, which is typically prepared in concert with a Fujitsu SE. Each RAID Group was made up of 2 disk drives in a RAID1(1+1) configuration and assigned to a specific CM for operational control. The RAID Groups were named RG00 through RG11 (decimal).

### **Step 2 – Creation of the Logical Volumes**

Wide striped logical volumes were created across 2 sets of RAID Groups (each with 6 RAID Groups). Three volumes were created on each of the RAID Groups, one for each of the three ASUs, for a total of 6 logical volumes. The sizes of two volumes created on the 2 sets for ASU-1 and ASU-2 were set to 1011220 MiB each. The sizes of the volume on the 2 sets for ASU-3 were set to 224710 MiB each.

### **Step 3 – Creation of the Global Hot Spares**

No drives were designated as the Global Hot Spare.

### **Step 4 – Assignment of LUN Mapping to the Linux Host Systems**

The **AF250S2\_20170809S24.exp** script provided mapping to 16 host ports.

The port LUN mapping was assigned for each of the Logical Volumes using two ports on each of the four Channel Adapters (CA) in each of the two Controller Modules (CM). Each of the volumes, which were defined on RAID Groups owned by CM-0, were assigned LUN numbers on the active ports on the four CAs installed on CM-0. Each of the volumes, which were defined on RAID Groups owned by CM-1, were assigned LUN numbers on the active ports on the four CAs installed on CM-1.

### **Step 5 – Creation of the two way striped logical volumes.**

Built in logical volume manager in Linux is used to stripe each pair of LUNs presented by AF250S2 array.

This is done in 3 steps included in the AF250S2\_20170809makeLV.sh script.

1. Create Physical Volumes (PV) for each LUN presented from AF250S2.

```
pvcreate /dev/disk/by-id/scsi-3600000e00d2800000028003400000000
pvcreate /dev/disk/by-id/scsi-3600000e00d2800000028003400010000
pvcreate /dev/disk/by-id/scsi-3600000e00d2800000028003400020000
pvcreate /dev/disk/by-id/scsi-3600000e00d2800000028003400030000
pvcreate /dev/disk/by-id/scsi-3600000e00d2800000028003400040000
pvcreate /dev/disk/by-id/scsi-3600000e00d2800000028003400050000
```

2. Create Three Volume Groups with physical extent size of 32MiB

```
vgcreate -s32m asu1vg /dev/disk/by-id/scsi-
3600000e00d2800000028003400000000 /dev/disk/by-id/scsi-
3600000e00d2800000028003400030000

vgcreate -s32m asu2vg /dev/disk/by-id/scsi-
3600000e00d2800000028003400020000 /dev/disk/by-id/scsi-
3600000e00d2800000028003400050000

vgcreate -s32m asu3vg /dev/disk/by-id/scsi-
3600000e00d2800000028003400010000 /dev/disk/by-id/scsi-
3600000e00d2800000028003400040000
```

3. Create Three Logical Volumes for each ASU with 32MiB Stripe size

```
lvcreate -l 100%VG -i2 -I32768 -n asu1 asu1vg
lvcreate -l 100%VG -i2 -I32768 -n asu2 asu2vg
lvcreate -l 100%VG -i2 -I32768 -n asu3 asu3vg
```

## Referenced Scripts

**doFDRcfg.sh**

**AF250S2\_20170809S24.exp**

**showFormatStatus.exp**

**AF250S2\_20170809makeLV.sh**

## **APPENDIX E: CONFIGURATION INVENTORY**

The following files (included in the Supporting Files) capture the configuration before and after the test run.

- log\_BeforeF\_JX171030070046.zlg\_001.txt
- log\_AfterJ\_JX171030070046.zlg\_001.txt

## **APPENDIX F: WORKLOAD GENERATOR**

### **ASU Definition File:**

The content of the ASU Definition file is included in the Supporting Files.

SPC1.AF250S2\_20170809S24.asu

### **Host Definition File:**

The content of the Host Definition file for the two-host configuration used is included in the Supporting Files.

SPC1.AF250S2\_20170809S24.hst

### **‘Master’ Execution Script**

The following ‘master’ script was used to execute the required ASU pre -fill, Primary Metrics Test (*Sustainability Test Phase, IOPS Test Phase, and Response Time Ramp Test Phase*), Repeatability Test (*Repeatability Test Phase 1 and Repeatability Test Phase 2*), the SPC-1 Persistence Test Run 1 and the SPC-2 Persistence Test in an uninterrupted sequence with doFDRall\_1XV.sh and doFDRall\_2H.sh.

The ‘master’ script invokes various other scripts which appear below in the **Referenced Scripts** section with a brief description of each referenced script.

The following files are included in the Supporting Files.

doFDRall\_1XV.sh

doFDRall\_2H.sh

### **Referenced Scripts**

The ‘master’ script invokes the following script (included in the Supporting Files) in order to export the log file from the storage array.

exportLog.exp